



TRACKED MANIPULATOR BOOM CL 8



Tracked manipulator boom with extremely versatile electric and diesel engine to be combined with a concrete pump with an additive dosing system for all spritz beton works in tunnels, mines and outdoors.

TECHNICAL DATA

Weight and dimensions


Weight	3000 kg
Dimensions	
Length	3700 mm
Width	1960 mm
Height	2400 mm

Motor diesel + electric

Diesel engine	23 KW
Electric engine	15 KW
Electrical system voltage	24 Volt

Performance

Max. speed	1,8 Km / h
Gradeability surmountable	39 degrees
Max. working height	9 mt.
Max. working width	12 mt.
Rotation boom	270 degrees
First angle	+ 70 / - 70
Nr. of extensions	3
Telescopic extension	2700 mm

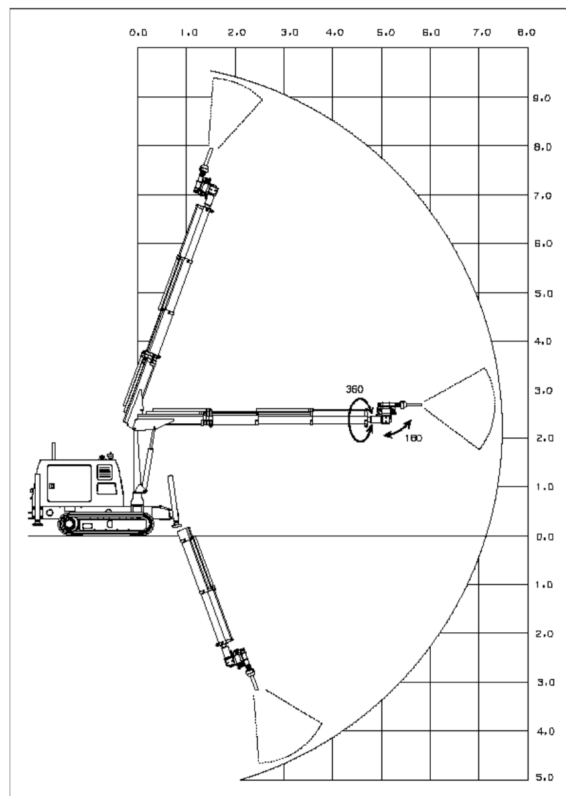

Automation nozzles

Rotation nozzle	360 degrees
Inclination nozzle	180 degrees
continuous rotation	12 degrees

Installable nozzle

At dry or at wet from
diameter 40 or 65 mm

Equipment

Radio remote control with
emergency cable.
Front and back hydraulic outriggers.

