


2010 Crawler concrete pump




EASY TO HANDLE AND MAINTAIN , FULL OPTIONAL AS A STANDARD , LEAVES LESS MANUAL JOB TO THE OPERATOR.

THE STRONG CLOSED LOOP CIRCUIT MADE WITH COIME DESIGN WITHOUT ELECTRIC SENSORS AND STROKE END ELECTRIC DEVICES ENSURE A STURDY ABILITY TO GO ON PUMPING WITHOUT STOPPING.

HIGHT QUALITY OF WEAR PARTS , FULL THICKNESS 600HB WEAR PLATE AND RING , CARBON TREATMENT ON THE CINEMATIC , AUTOMATIC LUBRICATION AND GREASING ENSURE LARGE QUANTITY OF CONCRETE PUMPED TROUBLEFREE.

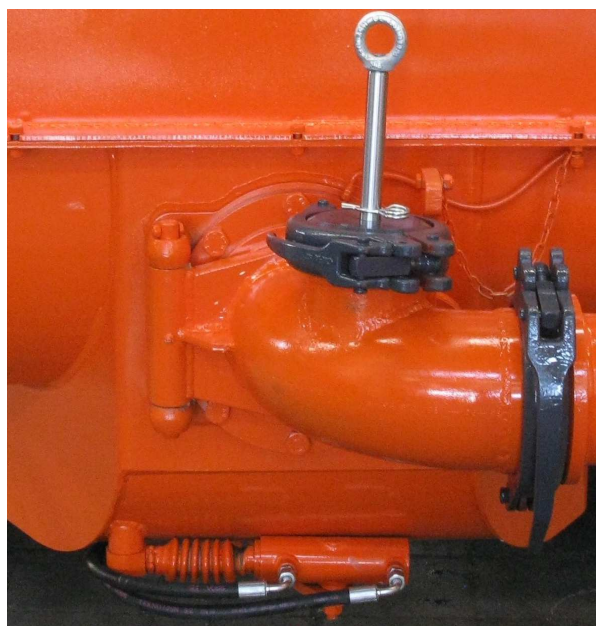

Coime Concrete Equipment : via Cascina Duomo, 5 - 20010 Pregnana Milanese (MI)
tel++39.029364141 fax ++39.0293563766 Mail: coime@coime.com



POWER DIAGRAM

PUMPING UNIT 2010 PERFORMANCE DATA

CONCRETE OUTPUT	70	M3/H
STROKES PER MINUTE	37	MIN-1
CONCRETE PRESSURE	60	BAR
DIESEL MOTOR POWER	80	KW
CONCRETE CYLINDER DIAMETER	200	MM
STROKE LENGHT	1000	MM
MAXIMUM AGGREGATE SIZE	41	MM
HYDRAULIC OIL CAPACITY	150	L
OUTLET SIZE	150	MM
WEIGHT (APPROX)	3500	KG


OVERALL DIMENSIONS 5300L X 2200W X 2000H



OPTIONALS :

- REDUCTION CONE
- STEEL EXTENSION CONCRETE PIPELINE
- FLEXIBLE CONCRETE HOSES
- COUPLINGS AND GASKETS FOR CONCRETE PIPELINE
- CONCRETE ELBOWS

PRESSURE ON CONCRETE BAR

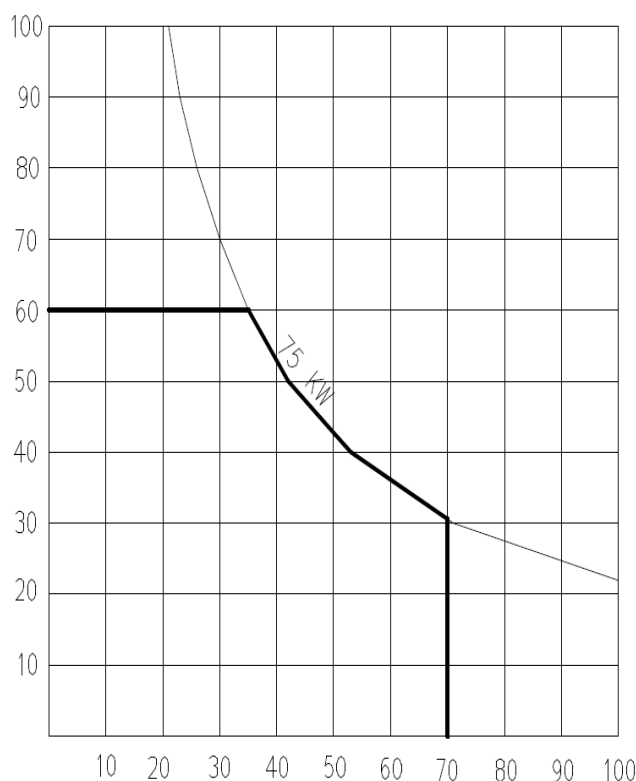

OUTPUT M3/H

STANDARD FEATURES :

- HEAVY DUTY 'S' VALVE
- CLOSED LOOP HYDRAULIC SYSTEM WITH VARIABLE DISPLACEMENT PUMP
- CARBON TREATMENT LONG LIFE ON WEAR PARTS
- WASHOUT WATER PUMP
- HOPPER AGITATOR
- HYDRAULIC DRIVE HOPPER DISCHARGE GATE
- VIBRATOR FOR HOPPER SCREEN
- OIL COOLER
- CONTROL PANEL
- DISPLAY WITH WORKING PARAMETERS SETTING AND DIAGNOSTIC
- RADIO REMOTE CONTROL WITH EMERGENCY CABLE