



# 2060 PNEU

## CONCRETE PUMP PNEUMATIC POWER DRIVE ELECTRIC FREE



### MAIN FEATURES

COMPACT CONCRETE PUMP WITH S VALVE SYSTEM.  
WITHOUT ELECTRIC COMPONENTS.

HYDRAULIC POWER CIRCUIT CLOSED LOOP HIGH PRESSURE WITH MANUAL  
PROPORTIONAL CONTROL LEVER FOR PUMPING AND REVERSE PUMPING.  
PUMPING UNIT POWER 10 KW.

CONCRETE HOPPER AGITATOR HYDRAULIC DRIVE.

MANUAL GREASING PLANT FOR VALVE AND AGITATOR SUPPORTS MADE WITH  
SEQUENTIAL MODE AND MAXIMUM PRESSURE SAFETY VALVE.

PNEUMATIC RADIAL ENGINE, MOTOR 13,5 KW AT 6 BAR AND 358 L/S AIR CON-  
SUMPTION.

MANUAL AIR FLOW CONTROL VALVE , AIR PRESSURE REGULATOR , FILTER , LU-  
BRICATOR .

EXHAUST AIR OIL REMOVING FILTER , SILENCER.


FORKLIFT LIFTING PROFILES AND UPSIDE HOOK FOR LIFTING.



## PUMPING UNIT PERFORMANCE AND DATA

CONCRETE OUTPUT	0 - 20	M3/H
STROKES PER MINUTE	0 - 19	MIN-1
CONCRETE PRESSURE	60	BAR
PNEUMATIC MOTOR POWER	13,5	KW
CONCRETE CYLINDER DIAMETER	200	MM
STROKE LENGHT	570	MM
MAXIMUM AGGREGATE SIZE	38	MM
HYDRAULIC OIL CAPACITY	140	L
HYDRAULIC MAX PRESSURE	350	BAR
OUTLET SIZE	150	MM
WEIGHT	2300	KG

## PERFORMANCE DIAGRAM

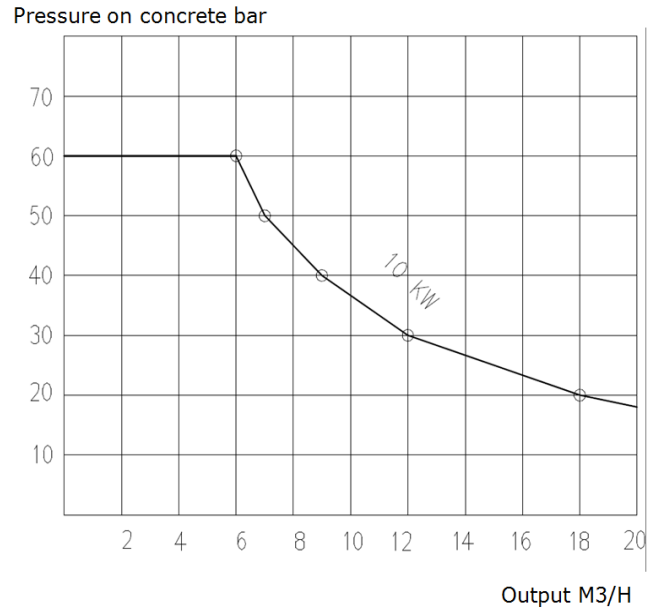

**OVERALL DIMENSIONS** 2450L X 1700H X 1400W

### AIR COMPRESSOR REQUIRED :

- 22.000 L/MIN
- 7 BAR

### STANDARD FEATURES :

- HEAVY DUTY 'S'VALVE
- CLOSED LOOP HYDRAULIC SYSTEM WITH VARIABLE DISPLACEMENT PUMP
- HOPPER AGITATOR
- OIL COOLER
- MANUAL CONTROL



### OPTIONALS :

- REDUCTION CONE
- STEEL CONCRETE PIPELINE
- FLEXIBLE CONCRETE HOSES
- COUPLINGS AND GASKETS FOR CONCRETE PIPELINE
- CONCRETE ELBOWS
- SPONGE BALL STOP
- WASHOUT WATER PUMP